



DUPONT™ PYRALUX® FR COVERLAY

FLEXIBLE COMPOSITES

PRODUCT DESCRIPTION

DuPont™ Pyralux® FR™ coverlay is a composite of DuPont™ Kapton® polyimide film, coated on one side with a proprietary, flame-retardant B-staged acrylic adhesive. Coverlay can be used to encapsulate etched details in flexible and rigid-flex multilayer constructions for environmental protection and electrical insulation.

CONSTRUCTION

Coverlay is available in a variety of film and adhesive thicknesses. **Table 1** lists typical constructions.

The product code must be used when ordering sheet adhesive from DuPont.

PACKAGING

Pyralux® coverlay composites are supplied on 24 inch (610 mm) wide by 250 feet (76 m) long rolls, on nominal 3 inch (76 mm) cores. Narrower widths or cut sheets are also available by special order.

TYPICAL DATA

Each manufactured lot, except the four coverlay constructions noted in **Table 1**, is certified to IPC specifications and tested according to IPC Test Method TM-650. See **Table 2**.

Table 1. Coverlay Product Codes

Product Code	Adhesive	Kapton®	IPC
	mil (µm)	mil (µm)	Certification*
FR0110	1 (25)	1 (25)	Yes
FR0120	1 (25)	2 (51)	Yes
FR0130	1 (25)	3 (76)	Yes
FR0150	1 (25)	5 (127)	Yes
FR0210	2 (51)	1 (25)	Yes
FR0220	2 (51)	2 (51)	Yes
FR0230	2 (51)	3 (76)	Yes
FR0250	2 (51)	5 (127)	Yes
FR0310	3 (76)	1 (25)	Yes
FR7001	1/2 (13)	1/2 (13)	Yes
FR7013	1 (25)	1/2 (13)	Yes
FR7082	2 (51)	1/2 (13)	No
FR1510	1/2 (13)	1 (25)	Yes
FR7332	3/4 (19)	1/2 (13)	No

*Certified to IPC-4203/1: "Adhesive Coated Dielectric Films for Use as Cover Sheets for Flexible Printed Circuits."

Table 2. Pyralux® FR Coverlay Properties

Property	Typical Coverlay Value	Test Method
Flammability*	VTM-0	UL94
Meets UL746E Direct Support Requirements	Yes	UL746E
Peel Strength**	–	IPC-TM-650, No. 2.4.9
After lamination	1.6 N/mm (9 lb/in)	Method B
After soldering	1.6 N/mm (9 lb/in)	Method D
Solder Float Resistance 10 sec at 288°C (550°F)	Pass	IPC-TM-650, No. 2.4.13 Method B
Adhesive Flow, µm/µm (mil/mil)	4.0	IPC-TM-650, No. 2.3.17.1
Thickness Tolerance	±10%	IPC-TM-650, No. 4.6.2
Dimensional Stability	-0.03%	IPC-TM-650, No. 2.2.4 Method A
Dielectric Constance (at 1 MHz)	3.5	IPC-TM-650, No. 2.5.5.3
Dissipation Factor (at 1 MHz)	0.02	IPC-TM-650, No. 2.5.5.3
Dielectric Strength	137 kV/mm (3500 V/mil)	ASTM D-149
Insulation Resistance (at ambient)	10 ⁶ megohms	IPC-TM-650, No. 2.6.3.2
Volume Resistivity (at ambient)	10 ⁹ megohm-cm	ASTM D-257
Surface Resistance (at ambient)	10 ⁷ megohms	ASTM D-257

* Laminating Conditions: 14 kg/cm² (200 psi), 182°C (360°F), 1 hour to treated side of 1 oz RA copper foil.



DUPONT™ PYRALUX® FR COVERLAY

A Certificate of Conformance is available with every batch. Complete material and manufacturing records for each lot, with samples of finished product, are retained for reference purposes. The roll labels contain the lot number, DuPont order number, customer order number, IPC specification, customer specification, and customer part number; save these labels for reference in case of inquiries.

PROCESSING

Laminating conditions for DuPont™ Pyralux® flexible composites are typically in the following ranges:

Part Temperature: 182–199°C (360–390°F)
Pressure: 14–28 kg/cm² (200–400 psi)
Time: 1–2 hours, at temperature

Pyralux® FR can be processed like Pyralux® LF. Refer to publication “Pyralux® Flexible Composites Technical Manual” for further processing details.

STORAGE CONDITIONS AND WARRANTY

Pyralux® FR flexible laminates should be stored in the original packaging at temperatures of 4–29°C (40–85°F) and below 70% humidity. The product should not be frozen and should be kept dry, clean and well-protected. Subject to compliance with the foregoing handling and storage recommendations, DuPont’s warranties, as provided in the DuPont Standard Conditions of Sale, shall remain in effect for a period of two years following the date of shipment.

SAFE HANDLING

Pyralux® FR coverlay, sheet adhesive, and bond ply contain a B-staged adhesive. Since B-staged adhesive contains trace quantities (parts per million) of unreacted monomers, operators should take care to minimize contact.

Pyralux® FR copper-clad laminates contain fully-cured (C-staged) adhesive.


Although DuPont is not aware of anyone developing contact dermatitis when using Pyralux® FR products, some individuals may be more sensitive than others. Anyone handling Pyralux® FR products should wash their hands with soap before eating, smoking, or using restroom facilities. Gloves, finger cots, and finger pads should be changed daily. Clothes should be washed frequently.

The unreacted acrylic monomer in the adhesive may impart a mild odor when the release film or paper is removed. We recommend that areas where B-staged materials are used, as well as lay-up and lamination areas, be well-ventilated with a fresh air supply.

Pyralux® adhesive is cured during lamination. The curing reaction does not produce any vapors, although impurities may volatilize. When drilling or routing parts made with Pyralux® FR flexible composites, provide adequate vacuum around the drill head to minimize worker exposure to adhesive dust.

Thin copper-clad laminates can have sharp metal edges. People handling these materials should be cautioned and provided with suitable gloves to prevent cuts.

Pyralux® FR flexible composites DO NOT contain polybrominated biphenyls (PBBs), polybrominated biphenyl oxides (PBBOs), or polybrominated diphenyl ethers (PBDEs).

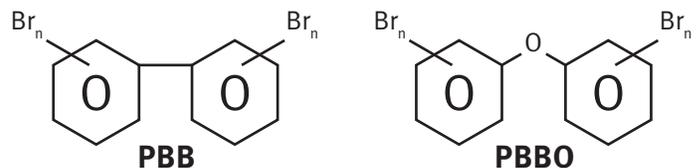

pyralux.dupont.com

Copyright © 2015 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™, and all DuPont products denoted with ® or ™ are registered trademarks or trademarks of E. I. du Pont de Nemours and Company or its affiliates.

This information corresponds to our current knowledge on the subject. It is offered solely to provide possible suggestions for your own experimentations. It is not intended, however, to substitute for any testing you may need to conduct to determine for yourself the suitability of our products for your particular purposes. This information may be subject to revision as new knowledge and experience becomes available. Since we cannot anticipate all variations in end-use conditions, DuPont makes no warranties, and assumes no liability in connection with any use of this information. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent right.

CAUTION: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, see “DuPont Medical Caution Statement,” H-50102-5

H-73234-5 (7/15)